

# AWNING WINDOW

## RYLOCK BAL C40 SERIES



Rylock's BAL C40 Awning Windows have been tested & certified by CSIRO to comply with the requirements of BAL C40. Available only with Rylock BAL C40 Double Glazing, these awning windows include specific componentry to pass the rigours of the exacting test regime



To ensure a tight seal when closed, two separate mechanical latches clamp the sash tightly against the outer frame. The dual seals surrounding the perimeter of the sash are then able to effectively exclude wind & water.



The operator handle folds neatly away from window dressings, giving a clean internal appearance. Stainless Steel fly screens (with extruded frames) are standard fitment to protect from any unexpected ember attacks


Outer frame & sash corners are mitred, enhancing the clean appearance of the window. The substantial frame couples neatly with fixed panels up to 2.4 square metres in area, & either hinged or sliding doors.

Maximum sash sizes are typically **2400mm high by 900mm wide**, or **900mm high by 2400mm wide**

# AWNING WINDOW



## RYLOCK BAL C40 SERIES

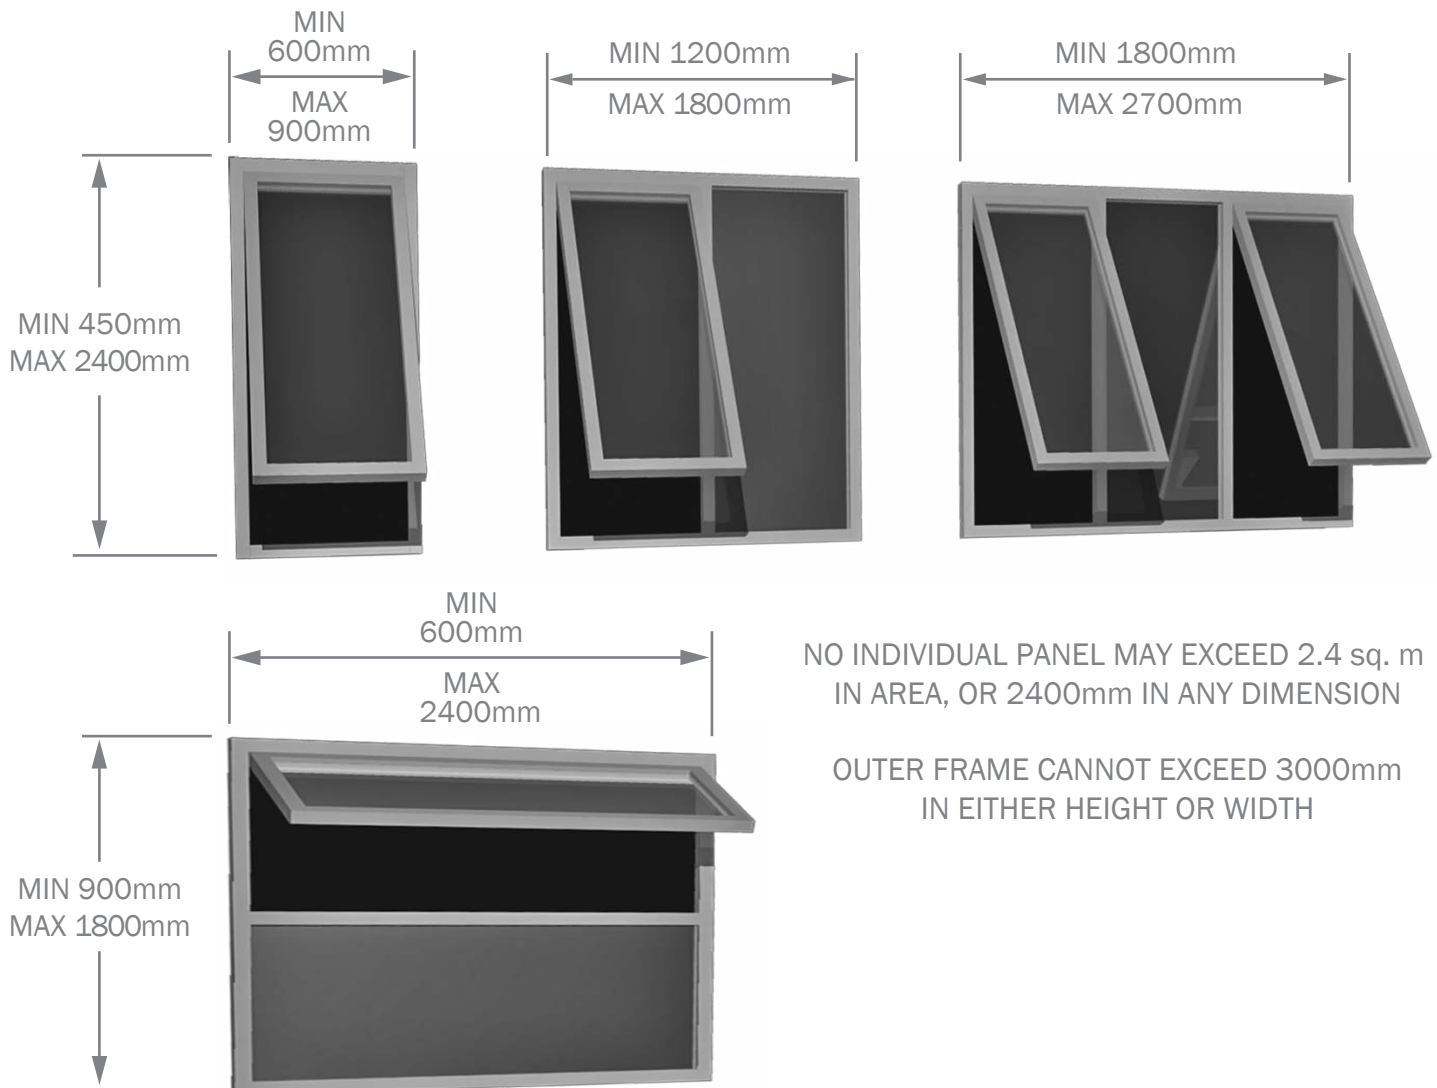

**NOTE:** SIZES ARE OFTEN TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

### Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Rylock 'BAL C40 double glazing' only

Any opening sash will be screened with stainless steel mesh

### Certification

Certification for BAL C40 (from CSIRO), in addition to WERS and other performance data are available on request

### Specify

Frame colour, configuration, height, width & overall depth

Optional: operator & latch colour, reveal equaliser, external frame infill, sill flap, glass type