

COUNTER BALANCED DOUBLE-HUNG WINDOW



RYLOCK BAL C40 SERIES

Rylock's BAL C40 Awning Windows have been tested & certified by CSIRO to comply with the requirements of BAL C40. Available only with Rylock BAL C40 Double Glazing, these double-hung windows include specific componentry to pass the rigours of the exacting test regime

Double hung windows introduce unparalleled recirculation of air, through simultaneous operation of top & bottom panels. Warm air moves through the upper opening, whilst cooler air travels largely through the lower void


The combination of slender aluminium sashes & their clever location within the frame realises a window with clean lines & large viewable openings

Multiple weather seals within frame & sashes exclude rain, draughts & intrusive sound. This window is also rated for use in air-conditioned buildings

Stainless Steel fly screens (which are screw fixed to the exterior) are standard fitment to protect from any unexpected ember attacks



Pre-stretched, engineered rope runs through the counter balance pulleys. These rotate on sealed roller bearings, ensuring unparalleled ease of use, strength & durability



A stainless steel housing contains key-locking for vent & fully closed positions




A neat integral mullion allows multiple operating sashes or fixed panels within the one outer frame. Double hung units can also be coupled next to hinged & sliding doors

COUNTER BALANCED DOUBLE-HUNG WINDOW



RYLOCK BAL C40 SERIES

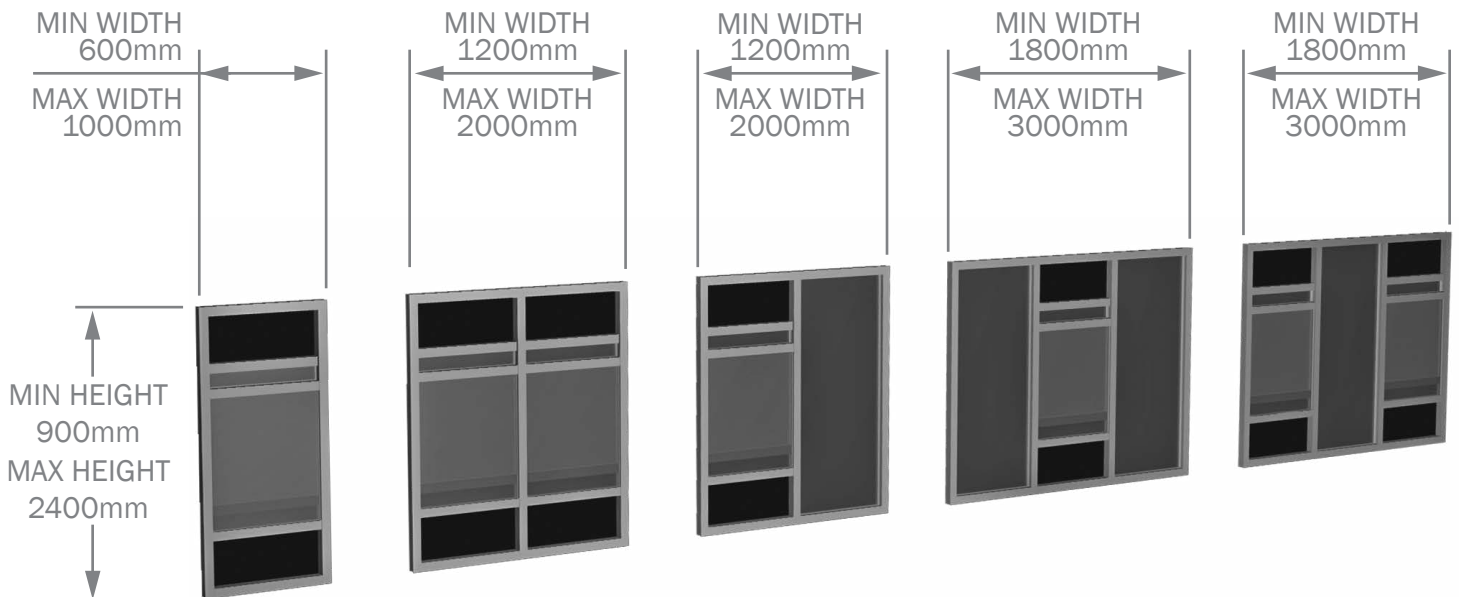

NO INDIVIDUAL PANEL MAY EXCEED 2.4 sq. m IN AREA, OR 2400mm IN ANY DIMENSION
PRODUCT WIDTH CAN NEVER EXCEED HEIGHT
OUTER FRAME CANNOT EXCEED 3000mm IN EITHER HEIGHT OR WIDTH

NOTE: SIZES ARE OFTEN TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE
PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Rylock 'BAL C40 double glazing' only

Any opening sash will be screened with stainless steel mesh, with screen frame screw-fixed to exterior

Certification

Certification for BAL C40 (from CSIRO), in addition to WERS and other performance data are available on request

Specify

Frame colour, configuration, height, width & overall depth

Optional: operator & latch colour, reveal equaliser, external frame infill, sill flap, glass type