

# FIXED LITE WINDOW



## RYLOCK BAL C40 SERIES


Rylock's BAL C40 Awning Windows have been tested & certified by CSIRO to comply with the requirements of BAL C40. Available only with Rylock BAL C40 Double Glazing, these fixed windows include specific componentry to pass the rigours of the exacting test regime



Mitred corners enhance the window's clean appearance. All fixings are made from durable stainless steel

The timber reveal sits inline with the frame's outer face, simplifying installation into a variety of wall types

Fixed Windows have a 90mm deep aluminium frame, & neatly couple to all BAL C40 Windows,. They can also couple to the wider (125mm) Sliding & Hinged Door frames to create side-lites or hi-lite details

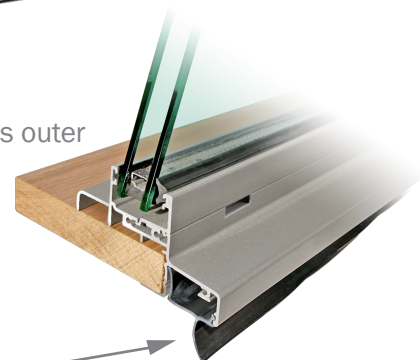


The optional sill flap may be specified when required

# FIXED LITE WINDOW



## RYLOCK BAL C40 SERIES

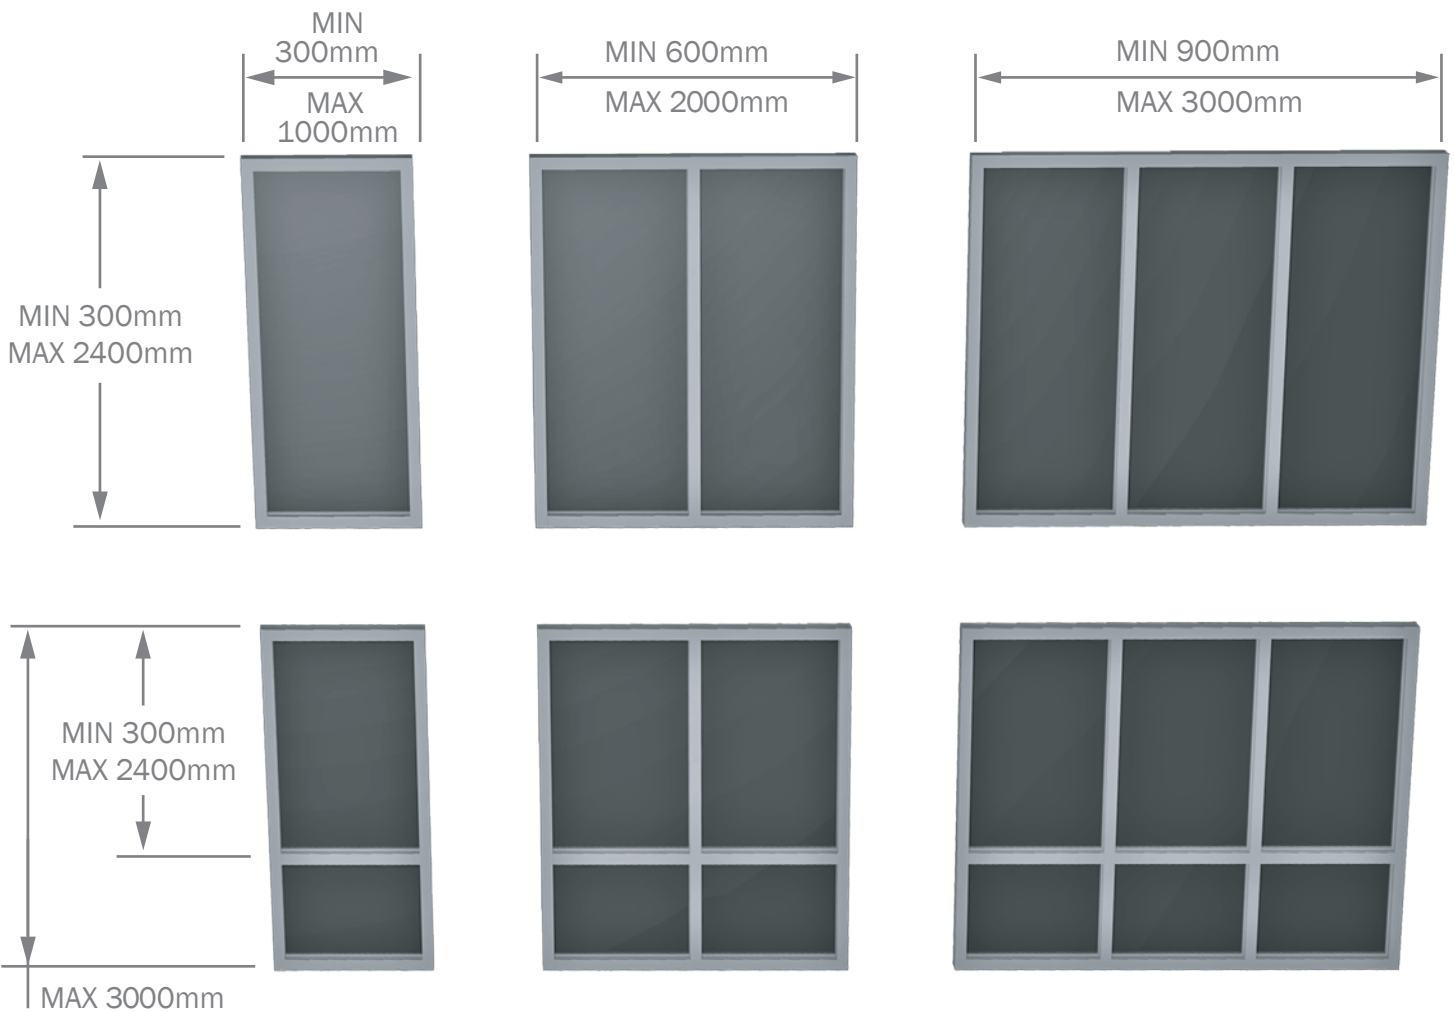

NO INDIVIDUAL PANEL MAY EXCEED 2.4 sq. m IN AREA, OR 2400mm IN ANY DIMENSION  
HEIGHT & WIDTH CAN TYPICALLY BE REVERSED  
OUTER FRAME CAN NOT EXCEED 3000mm IN EITHER HEIGHT OR WIDTH

**NOTE:** SIZES ARE OFTEN TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE  
PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

### Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Rylock 'BAL C40 double glazing' only

### Certification

Certification for BAL C40 (from CSIRO), in addition to WERS and other performance data are available on request

### Specify

Frame colour, configuration, height, width & overall depth

Optional: reveal equaliser, external frame infill, sill flap, glass type