

FIXED LITE WINDOW



RYLOCK BAL C40 SERIES


Rylock's BAL C40 Awning Windows have been tested & certified by CSIRO to comply with the requirements of BAL C40. Available only with Rylock BAL C40 Double Glazing, these fixed windows include specific componentry to pass the rigours of the exacting test regime



Mitred corners enhance the window's clean appearance. All fixings are made from durable stainless steel

The timber reveal sits inline with the frame's outer face, simplifying installation into a variety of wall types

Fixed Windows have a 90mm deep aluminium frame, & neatly couple to all BAL C40 Windows,. They can also couple to the wider (125mm) Sliding & Hinged Door frames to create side-lites or hi-lite details

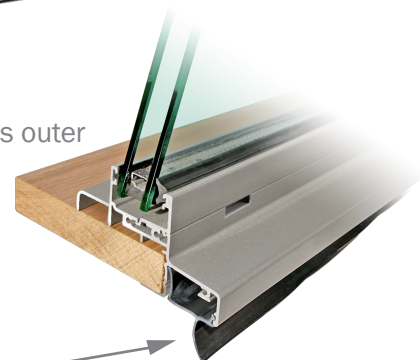


The optional sill flap may be specified when required

FIXED LITE WINDOW



RYLOCK BAL C40 SERIES

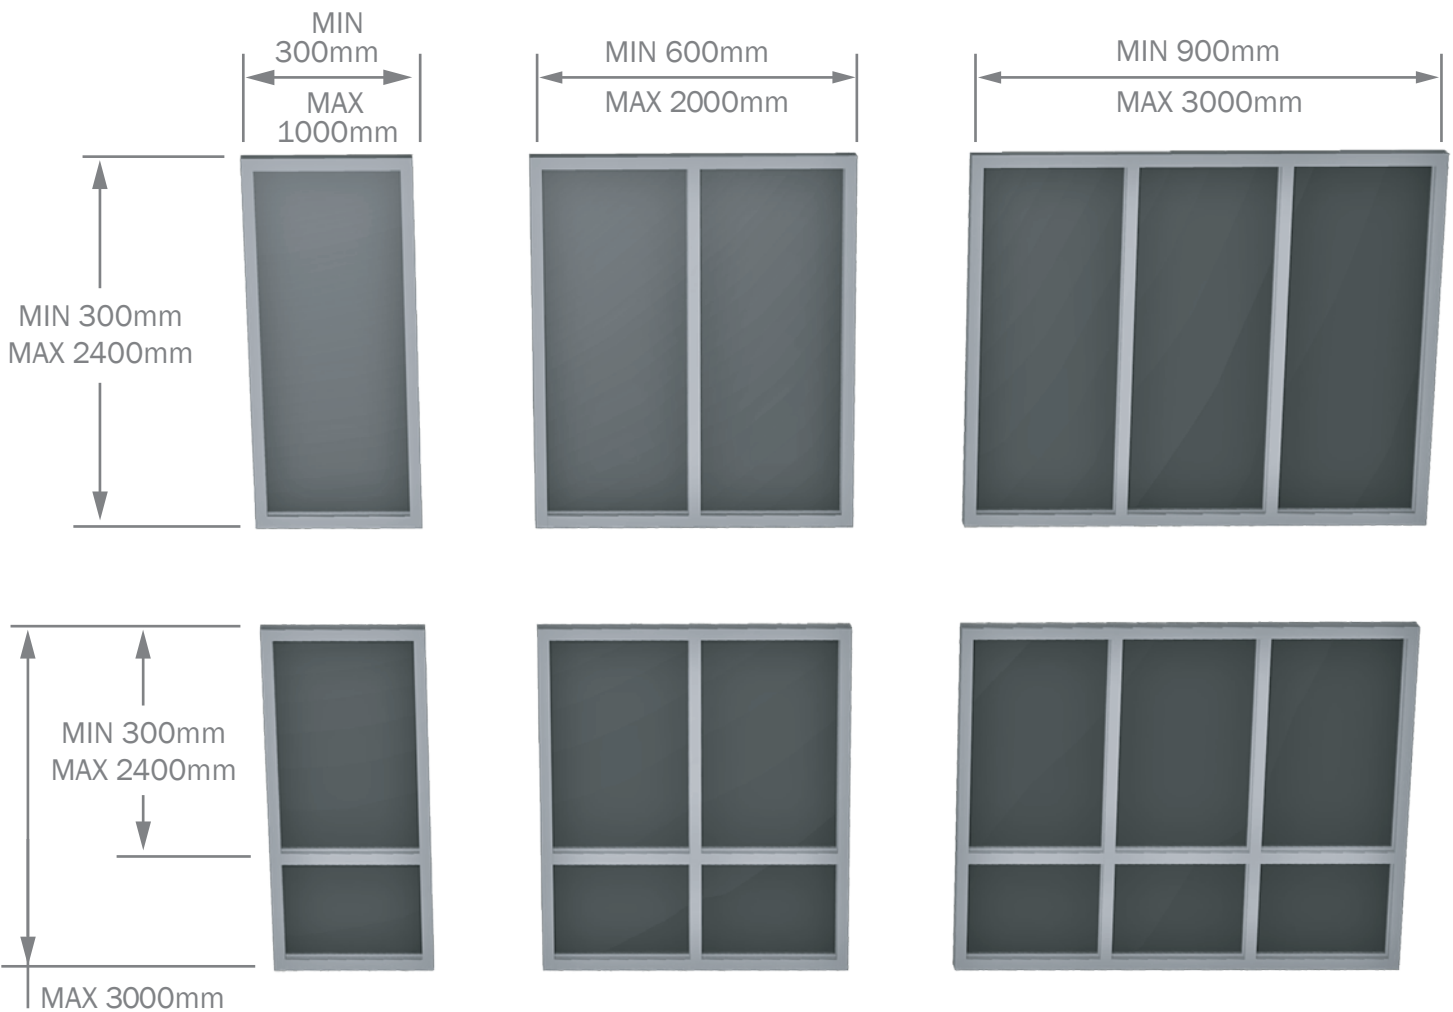

NO INDIVIDUAL PANEL MAY EXCEED 2.4 sq. m IN AREA, OR 2400mm IN ANY DIMENSION
HEIGHT & WIDTH CAN TYPICALLY BE REVERSED
OUTER FRAME CAN NOT EXCEED 3000mm IN EITHER HEIGHT OR WIDTH

NOTE: SIZES ARE OFTEN TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE
PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Rylock 'BAL C40 double glazing' only

Certification

Certification for BAL C40 (from CSIRO), in addition to WERS and other performance data are available on request

Specify

Frame colour, configuration, height, width & overall depth

Optional: reveal equaliser, external frame infill, sill flap, glass type