

# HINGED DOOR

## RYLOCK BAL C40 SERIES



Rylock's BAL C40 Hinged Doors have been tested & certified by CSIRO to comply with the requirements of BAL C40. Available only with Rylock BAL C40 Double Glazing, these Hinged Doors include specific componentry to pass the rigours of the exacting test regime

BAL C40 Hinged Doors can be coupled to all operable BAL C40 windows to enhance ventilation, whilst fixed windows create sidelite or highlite features




Door hardware is available standard in either black or a brushed silver finish, in either "Aria" (L) or "Summit" styles

The timber reveal sits inline with the frame's outer face, except where the optional 'reveal equaliser' is used for a more 'commercial' look




Corners are mitred to enhance the clean aesthetic, whilst all fixings are made from durable stainless steel

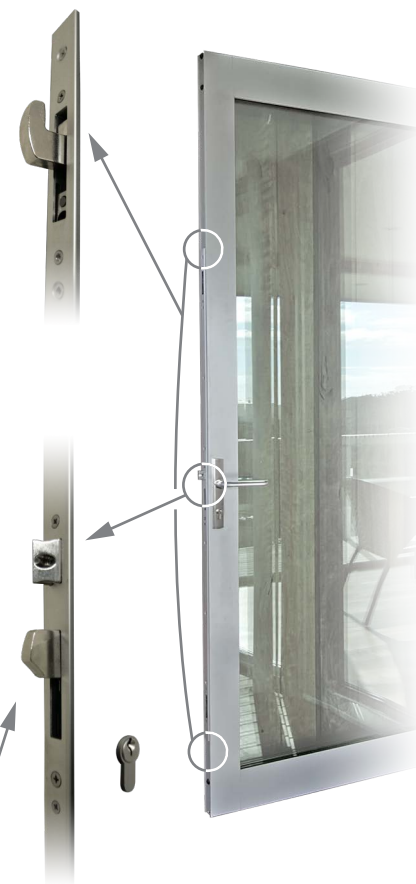

Lever compression locks secure at multiple points, offering peace of mind & superior weather protection

# HINGED DOOR

## RYLOCK BAL C40 SERIES

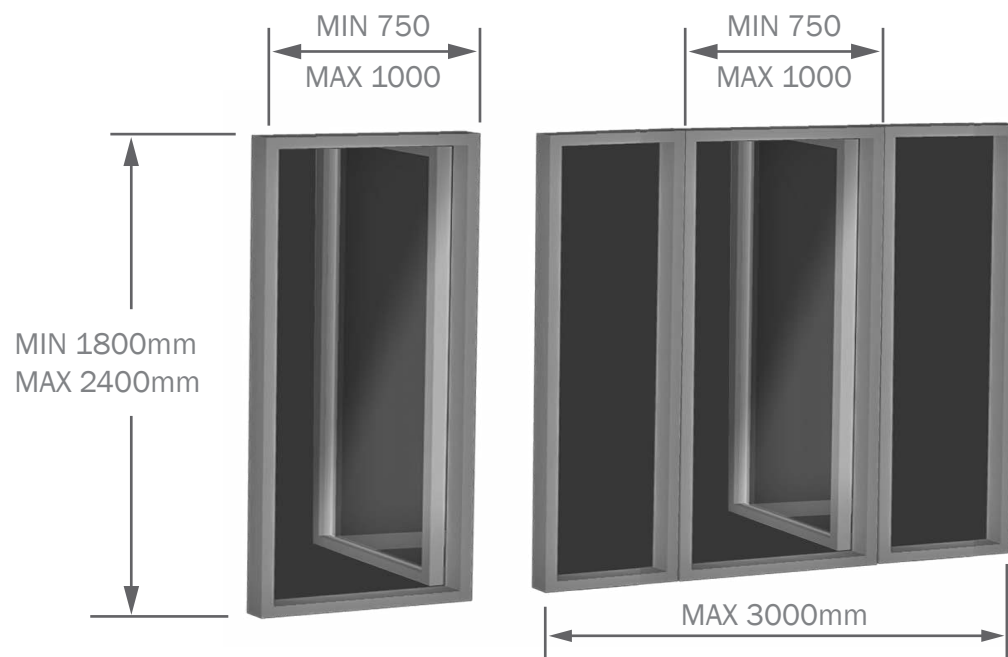

OPEN-IN, 1 PANEL CONFIGURATION ONLY (NO FRENCH DOORS).  
NO INDIVIDUAL PANEL MAY EXCEED 2.4 sq. m IN AREA,  
OR 2400mm IN ANY DIMENSION

**NOTE:** SIZES ARE OFTEN TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE PLEASE TALK WITH YOUR RYLOCK SALES CONSULTANT

### Sizing

Door style & opening detail should be considered as viewed externally

Sizes indicated are the overall door size. For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Rylock 'BAL C40' double glazing only

### Certification

Certification for BAL C40 (from CSIRO), in addition to WERS and other performance data are available on request

### Specify

Frame colour, configuration, height, width & overall depth

Optional: handle type & colour, external frame infill, frame equaliser, sill flap, glass type