

SUPERLITE WINDOW

RYLOCK BAL C40 SERIES



Rylock's BAL C40 Awning Windows have been tested & certified by CSIRO to comply with the requirements of BAL C40. Available only with Rylock BAL C40 Double Glazing, these windows include specific componentry to pass the rigours of the exacting test regime

The 125mm frame depth aligns neatly with the sliding & hinged doors in the BAL C40 Series. Raked - or frames outside of 90 degrees - are also possible



The timber reveal sits inline with the frame's outer face, except where the optional 'reveal equaliser' is used for a more 'commercial' style or aesthetic




A fixing pocket that accepts a neat cover strip means SuperLite frames are both easy to install and suited to a wide variety of walling types. An optional infill introduces a 15 x 3mm pocket for fitting flashings to fit into.

Mitred corners enhance the clean appearance of the window. All fixings are made from durable stainless steel

SUPERLITE WINDOW



RYLOCK BAL C40 SERIES

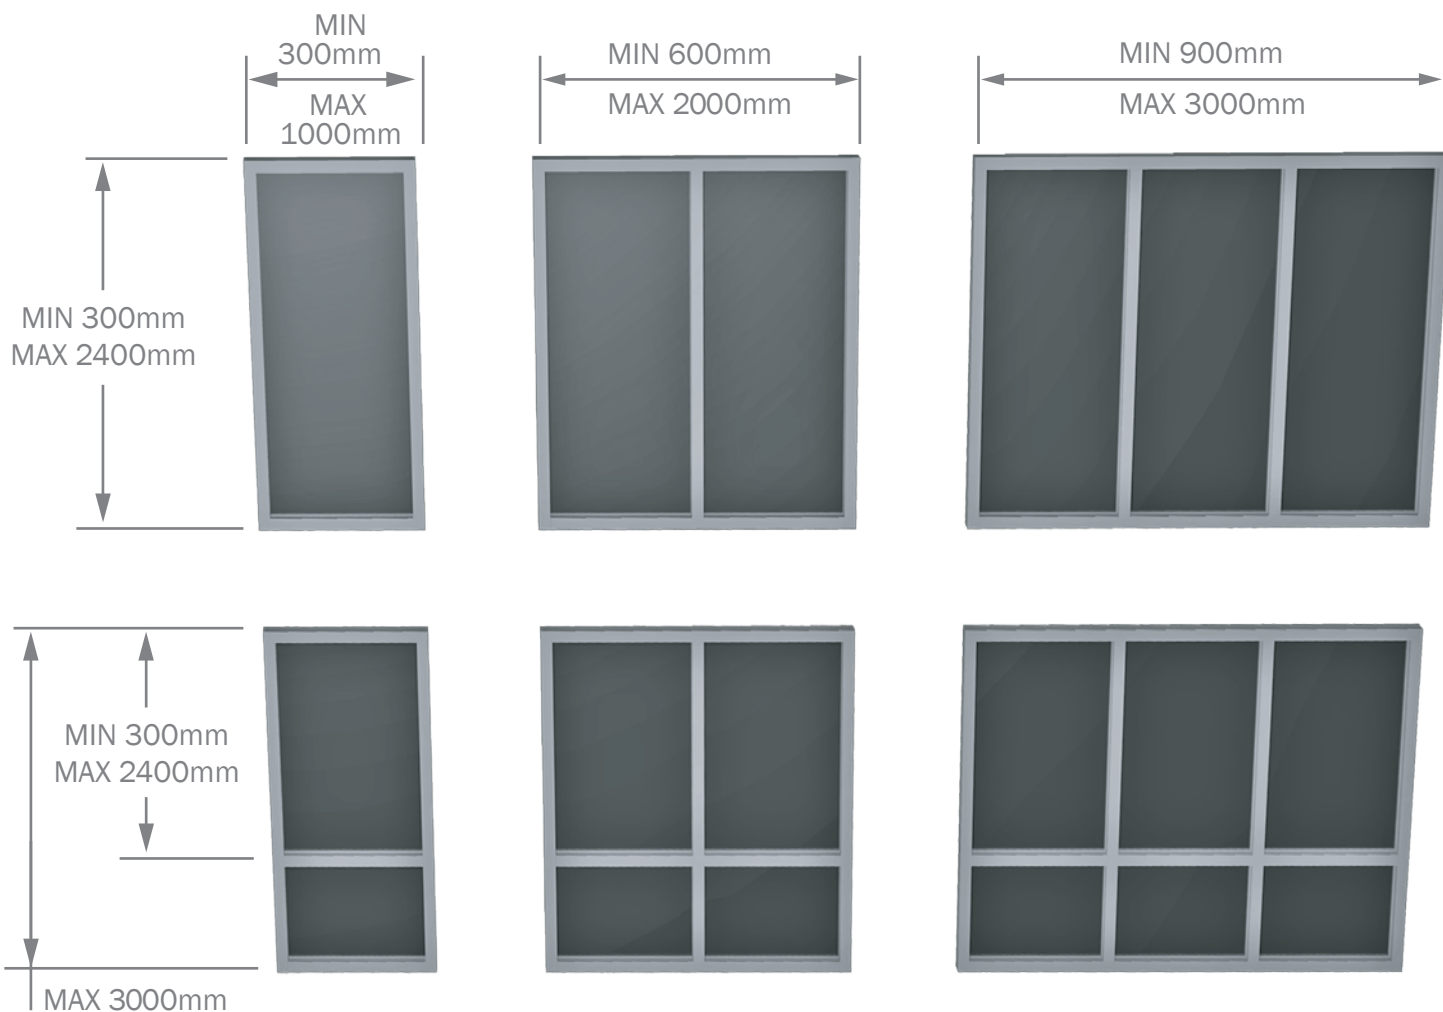

NO INDIVIDUAL PANEL MAY EXCEED 2.4 sq. m IN AREA, OR 2400mm IN ANY DIMENSION
HEIGHT & WIDTH CAN TYPICALLY BE REVERSED
OUTER FRAME CAN NOT EXCEED 3000mm IN EITHER HEIGHT OR WIDTH

NOTE: SIZES ARE OFTEN TYPICAL RATHER THAN DEFINITIVE (incl. raked windows).
FOR SIZES OUTSIDE OF THESE PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally
Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.
For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006
Rylock 'BAL C40 double glazing' only

Certification

Certification for BAL C40 (from CSIRO), in addition to WERS and other performance data are available on request

Specify

Frame colour, configuration, height, width & overall depth
Optional: reveal equaliser, external frame infill, sill flap, glass type