

# SLIDING DOOR

## SG SERIES



Sliding doors encourage access to the outdoors from interior living spaces, permitting egress & efficient ventilation. The slimline layout results in minimal intrusions into rooms or walkways



The secure lock assembly features anti-lift pins & is key lockable from inside & out



Fly screens fit to the outside, & run on tracks within the door's outer frame


Primed reveals offer a smooth substrate for internal painting. These can be replaced with an aluminium section for a more 'commercial' appearance

All panels roll on two 25kg rated, easily adjustable carriages. Sliding panels are weather-proofed with a minimum of dual wool-pile seals at each joint

Glass is installed into vinyl sided rebates, ensuring vibration free glazing. A wide selection of high performance glass types can be specified within the SG Series. These include body tints, super tints & a range of laminated glass up to 6.76mm in thickness

# SLIDING DOOR

## SG SERIES

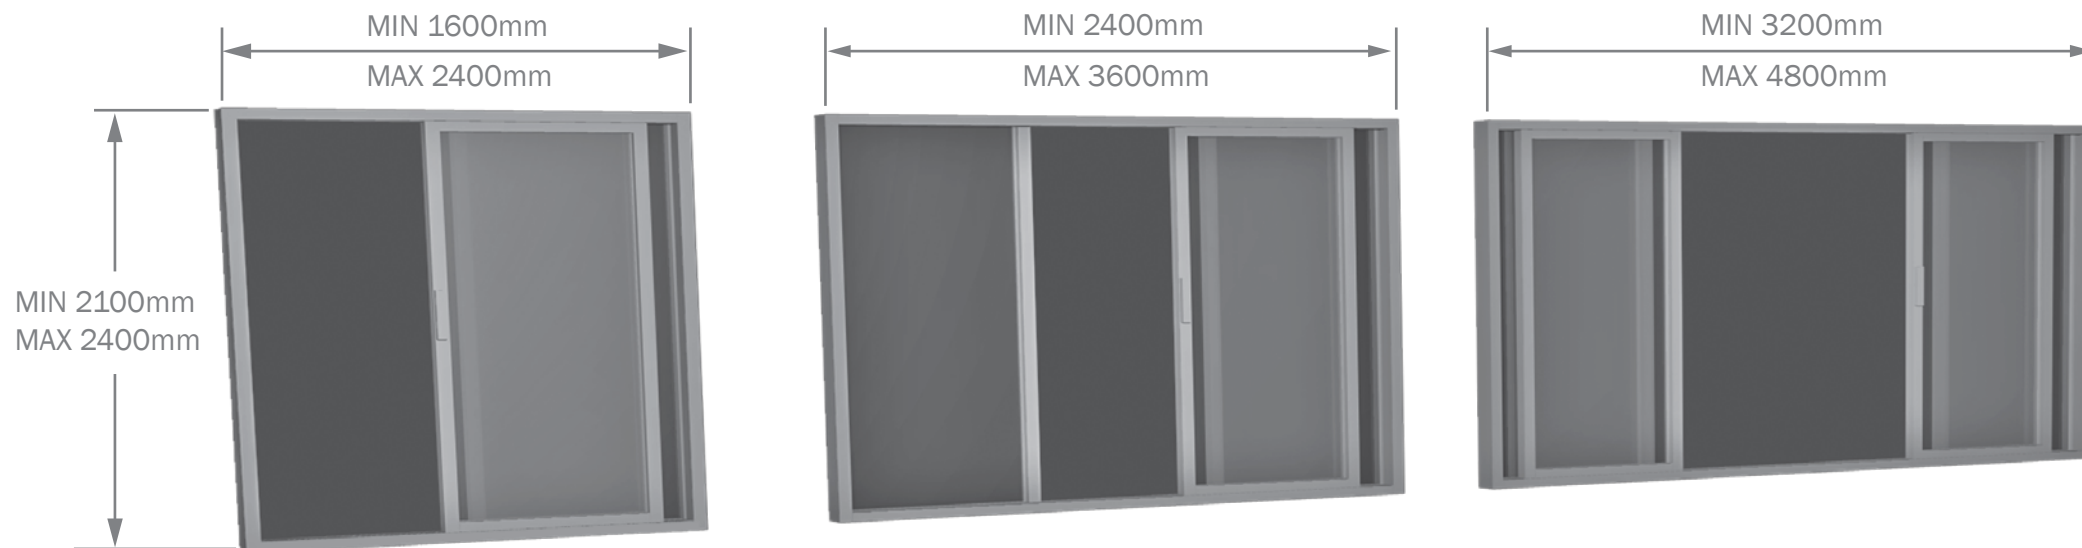

**NOTE:** ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE PLEASE TALK WITH YOUR RYLOCK SALES CONSULTANT

### Sizing

Door style & opening detail should be considered as viewed externally

Sizes indicated are the overall door size. For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Glazing to be grade A safety glass, to a maximum thickness of 6.76mm

### Certification

Certified performance data including WERS ratings are available for this product on request

### Specify

Frame colour, configuration, height, width & depth

Optional: handle type & colour, patio bolts, flyscreen, frame infill, frame equaliser, sill flap, glass type