STACKER DOOF

Rylock
windows & doors®

SG SERIES

Stacker doors are a natural evolution of the sliding door. Similar in concept, in practice they incorporate another row of sliding panels into a compact product, able to span large openings. A three panel door is illustrated,

however wider products can be supplied with six panels





Primed reveals offer a smooth substrate for internal painting. These can be replaced with an aluminium section for a more 'commercial' appearance /



Sliding panels are weather-proofed with a minimum of dual wool-pile seals at each join

All panels roll on two 25kg rated, easily adjustable carriages


The SG Series stacker door has compact dimensions, with a frame depth of only 100mm. A stacking flyscreen (optional) fits externally, increasing overall depth

Glass is installed into vinyl sided rebates, ensuring vibration free glazing. A wide selection of high performance glass types can be specified within the SG Series. These include body tints, super tints & a range of laminated glass up to 6.76mm in thickness

STACKER DOOR



SG SERIES

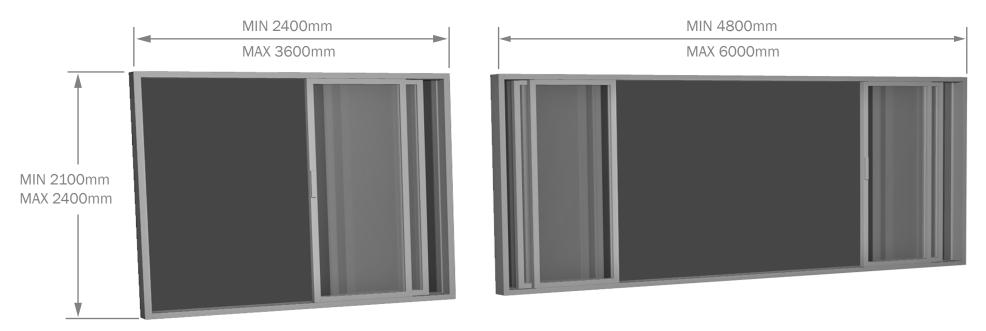

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE PLEASE TALK WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Door style & opening detail should be considered as viewed externally Sizes indicated are the overall door size. For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006 Glazing to be grade A safety glass, to a maximum of 6.76mm

Certification

Certified performance data is available for this product on request

Specify

Frame colour, configuration, height, width & depth

Optional: handle type & colour, patio bolts, flyscreen, frame infill, frame equaliser, sill flap, glass type