# HINGED DOOR

# Rylock windows & doors®

SG SERIES

Hinged doors are available as Open-In or Open-Out, single-panel or French doors, & couple neatly with either 100 or 65mm frames to create sidelite or highlite windows



Twin point locks are standard, whilst handle choices are 'Summit' or 'Aria' (right), in either black or brushed silver.

An internal snib makes for quck & easy security

Co-extruded santroprene seals ensure eficient weatherproofing, & resist shrinkage over time

Glass is installed into vinyl sided rebates, ensuring vibration free glazing. A wide selection of high performance glass types can be specified within the SG Series. These include body tints, super tints & a range of laminated glass up to 6.76mm in thickness




Primed reveals offer a smooth substrate for internal painting.

These can be replaced with an aluminium section for a more 'commercial' appearance

# HINGED DOOR



## SG SERIES

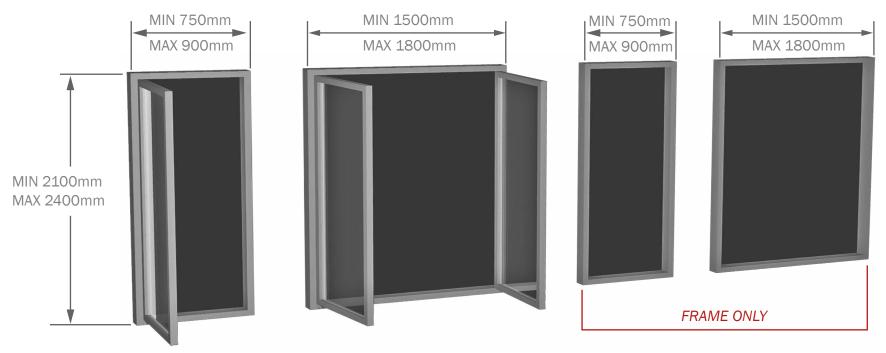

NOTE: DOORS ILLUSTRATED AS OPEN-OUT; OPEN-IN SIZE RANGE IS IDENTICAL.

ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE PLEASE TALK WITH YOUR RYLOCK SALES CONSULTANT

## Sizing

Door style & opening detail should be considered as viewed externally
Sizes indicated are the overall door size. For Stud openings add 20mm to both height & width

#### Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006 Glazing to be grade A safety glass, to a maximum of 6.76mm thick

#### Certification

Certified performance data including WERS ratings are available for this product on request

### Specify

Frame colour, configuration, height, width & depth, "frame only" (no panel supplied)

Optional: no sill, handle type & colour, frame infill, frame equaliser, sill flap, glass type